


OCXO (Oven Controlled Crystal Oscillator)

SMD Type NOC25227P [25.4×22.1×11.0 mm]	Waveform Rectangular	Best Stability ±5 ppb	Voltage Control	Supply Voltage 3.3V / 5.0V	Frequency Range 5MHz~40 MHz
--	---------------------------------------	--	------------------------	---	--

Features

- Oven Controlled Crystal Oscillator (OCXO)
- Dimension 25.4×22.1×11.0 mm, surface mount package
- Frequency range from 5MHz to 40MHz.
- ±10ppb stability over -40°C to +85°C.
- SC-Cut Crystal.
- Voltage control (Electronic frequency tuning) is available.
- RoHS Compliant
- Applications: SDH/SONET, Base station, Digital switch, Test equipment, Synthesizer, Measuring equipment, etc.

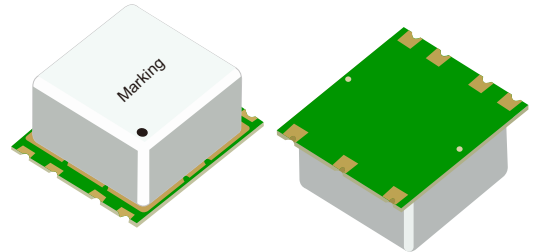

Standard Specifications

NOC25227P (SMD 25.4×22.1×11.0 OCXOs)

Parameter	Min.	Typ.	Max.	Unit	Test Condition
Output Frequency	5	-	40	MHZ	Standard frequencies are 10, 12.8, 19.2, 20, 25, 30.72MHz and more.
Wave Form	-	Rectangular	-	-	Please contact us for detail information
Level	-	HCMOS	-	-	
"1" Level	1.4V+1V 2.5V+1V	-	-	V	
"0" Level	-	-	1.4V-1V 2.5V-1V		
Duty Cycle	45	50	55		
Load	15pF				
Spurious	-	-	-60	dBc	
Frequency stability Tolerance	-10	-	+10	ppb	
vs. Temperature	±5ppb~±20			ppb	
vs. Supply voltage	-0.5	-	+0.5	ppb	±5% Change
vs. Load	-0.5	-	+0.5	ppb	
vs. Warm-up	-10	-	+10	ppb	In 3 minutes @ 25°C, reference to 1 hour
vs. Aging	-	-	-	-	
Daily	-0.5	-	+0.5	ppb	After 30 days continues operation
Yearly	-50	-	+50	ppb	
10 Years	-0.4	-	+0.4	ppm	

OCXO (Oven Controlled Crystal Oscillator)

SMD Type
NOC25227P
 [25.4×22.1×11.0 mm]

Waveform
Rectangular

Best Stability
±5 ppb

Voltage Control

Supply Voltage
3.3V / 5.0V

Frequency Range
5MHz~40 MHz

Standard Specifications

NOC25227P (SMD 25.4×22.1×11.0 OCXOs)

Parameter	Min.	Typ.	Max.	Unit	Test Condition	
Phase noise	-	-	-115	dBc/Hz	@ 10Hz	
	-	-	-130		@ 100Hz	
	-	-	-140		@ 1KHz	
	-	-	-150		@ 10KHz	
Electrical Frequency Adjustment	-	-	-			
Range	-	-	-0.5	ppm	VCO@0 V	
	0.5	-	-		VCO@ 5.0V	
Control	0	1.4 / 2.0	2.8 / 4.0	V	3.3V or 5.0V supply voltage	
Slope	-	Positive	-	-		
Input impedance	100	-	-	KΩ		
Input Power	Voltage	3.135	3.3	3.465	V	5.0V input voltage is available
	Current	-	-	-1000	mA	@ turn on
	Steady State	-	-	1.2	W	@ ±25°C
Operating Temperature	-40	-	+85	°C		
Storage Temperature	-40	-	-85	°C		

Dimensions And Pin-functions (Unit: mm)

